



wgcomtec.com

DIAMOND-BB/AA

NORM/HOMOLOGATIE:

ECE R65-2

72-LED HIGH POWER SYNCHRO FLASH BEACON

UITGAVE/VERSIE:

4-2-2021 09:37:34 1/1




RED = OPTIONAL ON REQUEST



MODEL: DIAMOND-BB



MODEL: DIAMOND-AA

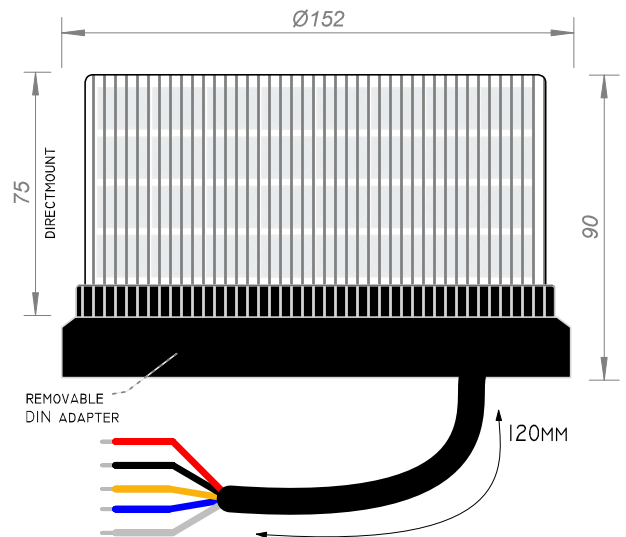

ELECTRIC

- VOLTAGE: 11..30VDC
- POWER: 48 WATT PEAK FOR BB/AA VERSION
- POWER: 36 WATT AVERAGE

FLASHPATTERN

- SINGLE (DEFAULT) PHASE-I OR 2
- DOUBLEFLASH PHASE-I OR 2

SYNCHRONISATION

- PHASE-I: SIMULTANEOUS
- PHASE-II: 180 DEGREES (ALTERNATING WITH PHASE-I)

PROTECTION

- INGRESS IP-67
- TOPCOVER U.V. STABILISED P.C.
- OPTICS: PMMA
- FRAME: ALUMINIUM EDP PROTECTED
- DIN ADAPTER: P.O.M. - GALVANIC ISOLATION -

LIGHT SOURCE

- 72 PCS SMD UHP DIODELAMP (LED) 1 WATT
- 4 ROWS / 18 COLUMNS

HOMOLOGATION


- SAE-W5-I REGULATION I6
- ECE R65 CLASS-II FOR BLUE & AMBER (ALL ECE VERSIONS)
- TB2-E9-00.1799 & TA2-E9-00.1800
- EMC: R10, CISPR25 E13-I0R-05.13858.00

VISIBILITY

- CLASS-II AT DAY, CLASS-I AT NIGHT
- RADIATION: HORIZONTAL 360 DEGR. VERT. >24 DEGR.

MOUNTING

- DIN-ADAPTER ACCORDING TO DIN I4.620 - BI

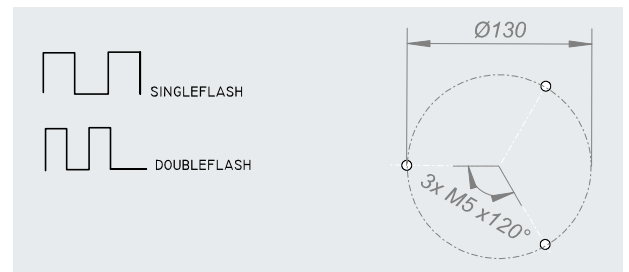

WIRING:

- RED = POWER ON +(11..30VDC) FUSE = 5A
- BLACK = (-) MINUS
- YELLOW = SYNCHRONISATION - INTERLINK WITH YELLOW
- WHITE = DIM/NIGHTMODE (+)
- PURPLE = COLOR CHANGE (+) - AB VERSION ONLY !
- BLUE = PATTERN SELECT (PULS TO +)