


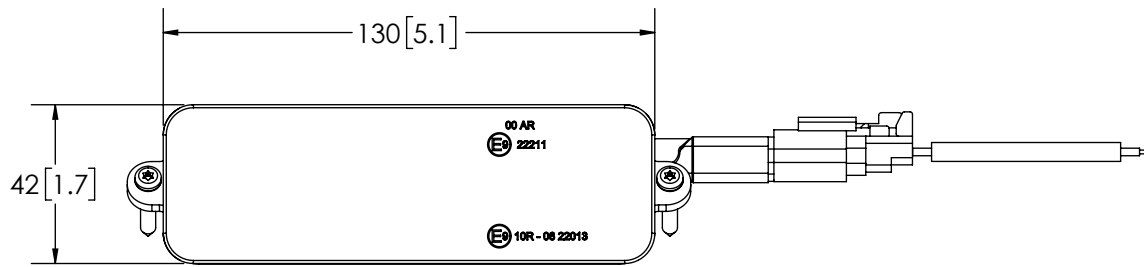


2-CONDUCTOR CABLE W/CONN
 2-18 AWG WIRES
 HOUSINGS: DEUTSCH P/N DT06-2S/DT04-2P
 TERMINALS: DEUTSCH P/N 0462-201-16141/0460-202-16141
 WEDGE LOCKS: DEUTSCH P/N W2S/W2P
 PIN 1- RED(+)POSITIVE
 PIN 2- BLACK(-)NEGATIVE
 OVERALL CABLE LENGTH: 415±25

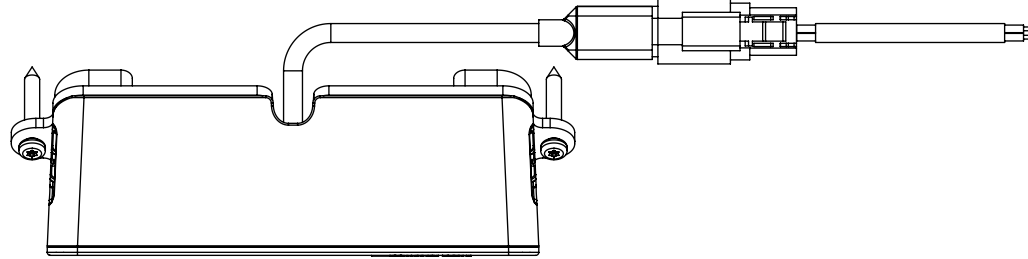

NOTES:
 1. DIMENSIONS IN MILLIMETRES [INCHES (FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK, AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREOF. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2020 ELECTRONIC CONTROLS COMPANY

DISCLAIMER
 DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

SCALE 1:2		APPROVALS	DATE
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: 01		DRAWN BY: LSH	2020-07-17
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		CHECKED: PPK	2020-07-20
MILLIMETERS DECIMALS XX ± 1.0mm XX.X ± 0.5mm	INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	MECH. ENG. KW	2020-07-17
		ELEC. ENG. MMG	2020-07-17
		TEST ENG. JRT	2020-07-29
		SALES. RG	2020-07-20
THIRD ANGLE PROJECTION		Electronically Controlled Use Latest Copy	

REVISION HISTORY			
REV.	DESCRIPTION	DATE	
01	PRELIMINARY RELEASE PER LL0347	2020-07-17	
A	INITIAL RELEASE PER LL0347	2020-07-29	

 ECCO ® www.eccolink.com Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444		CUSTOMER PART NO. EW2701	
		SIZE: A4	DWG. NO. EW2701
SHEET 1 OF 1		Project: LL0347	Date Created: 2020-07-16

SPECIFICATIONS

- CERTIFICATIONS: CE; IP67; ECE R10; R23; CISPR 25
- Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- RAW LUMENS: 2800 lumens
- EFFECTIVE LUMENS: 2200 lumens
- ILLUMINANCE (@100 FT): 3.6 lux
- PEAK BEAM INTENSITY: 3400 candela
- VOLTAGE (NOMINAL): 12 to 24 VDC
- VOLTAGE (EXTREME): 9 to 36 VDC
- CURRENT (PEAK): 1.6A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 19.2W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -40°F (-40°C) TO 140°F (60°C)
- CONNECTION: 2 – 18 AWG WIRES W/CONN
- MOUNTING: SURFACE MOUNT (35°&48°)
- HOUSING MATERIAL: ALUMINUM
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 0.24 Kg (0.53LBS)