
	REVISION HISTORY							
REV.	DESCRIPTION	DATE						
Α	INITIAL RELEASE PER P13012	2017-04-26						

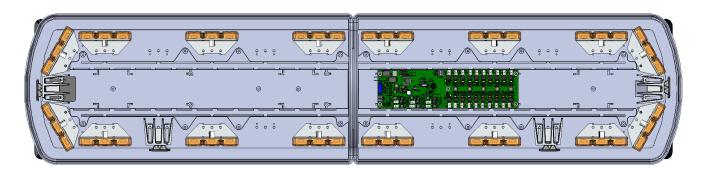

WIRING KEY @12V								
COLOR	COMPONENT	TYP. MAX CURRENT (A)						
RED	MAIN POWER	0.55 x 16 LED 1.20 x #WORKLIGHT						
BLK	GROUND	20A Limit						
BRN	PATTERN 1	0.004						
ORG	PATTERN 2	0.004						
YEL	ALLEY LEFT	0.004						
GRN	ALLEY RIGHT	0.004						
BLU	WORKLIGHT	0.004						
VIO	PATTERN SELECT	0.004						

REAR OF VEHICLE

SPECIFICATIONS

- 1. FLASH MODE: MAXIMUM 125 ± 5 FPM
- 2. VOLTAGE (NOMINAL): 12-24 VDC 3. CURRENT (NOMINAL): 13.6A @ 12 VDC
- 4. CONNECTION: 14, 18 AND 24 AWG WIRES
- 5. MOUNTING: 4-BOLT THROUGH MOUNTING KIT
- 6. BASE MATERIAL: ALUMINUM/POLYCARBONATE
- 7. LENS MATERIAL: POLYCARBONATE
- 8. WITH HANDHELD CONTROLLER: NO
- 9. CERTIFICATION: R10 & R65 APPROVED



NOTES:

- 1. CABLES AND WIRING NOT SHOWN
- 2. TOP VIEW: TOP LENSES NOT SHOWN FOR CLARITY
- 3. MOUNTING FEET: ADD 44mm TO OVERALL HEIGHT
- 4. THE LENGTH BETWEEN MOUNTING FEET IS ADJUSTABLE
- 5. CABLE LENGTH 15' FROM INTERNAL CONNECTOR
- 6. CABLE EXIT DRIVER'S SIDE
- 7. LED LENSES ARE COLORED FOR CLARITY ONLY
- 8. DIMENSIONS IN MILLIMETERS[INCHES(FOR REFERENCE)]

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ELECTRONIC CONTROLS O. AND IS ISSUED IN COMPIDENCE FOR BEGINEERING IN PROFRMATION ON JUNY, THE DRAWING AND I/O DE DESIGN MAY NOT BE USED. COPIED, PEPRODUCED, OR OTHERWISE DISCLOSED IN PAST OR AS WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITH CONSENT OF ELECTRONIC CONTROLS CO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME, YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS CONTROLS CONTROLS CO.

	SCALE 1:8.5		APF	PROVALS	DATE						
CAD CENTER TIED DIG TATING			DRAWN BY LSH 2017-04-26			ECCO ° www.eccolink.com					
DO NOT MANUALLY UPDATE. MODEL REFERENCED: A		CHECKED	MDG	2017-04-26							
Γ	TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:			MECH. ENG.			Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 6332244				3 63322444
-	MILLIMETERS DECIMALS INCHES DECIMALS ANGLES ± 0.5°		ELEC. ENG.			LBR,1	2+ ICE,48"/1.	.22M,143	3-30012-12,	.R65	
	XX. ± 1.0mm XX.X ± 0.5mm	X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	FRACTIONS	TEST ENG.			CUSTOMER PAR 12-300			PRODUCT SERIES:	
\dashv	X.XXX ± 0.02 ± 1/64 THIRD ANGLE PROJECTION		SALES.			12-300	IZ-C		1 Z		
AS	s (() (-)					SIZE: A	DWG. NO.	12-300	12-E	REV.	
0.			Electronically Controlled Use Latest Copy		SHEET 1 OF 1	Project: P13012	Date Cre	eated: 2017-04-26	A		