



□ i8-LED-AB

NORM/HOMOLOGATIE:


ECE R65 Klasse-1 & 2 XB2 (Blauw)
ECE R65 Klasse-1 & 2 XA2 (Amber)



R65 Class-2 Amber + Blue combicolor

UITGAVE/VERSIE:


4-6-2015 07:29:17 2/2

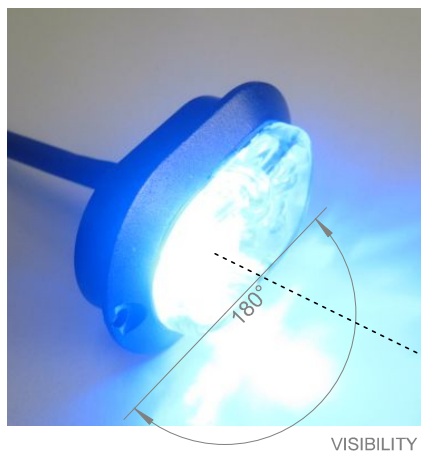

240 CD
effective/25 meters



IP-68 Waterproof connector

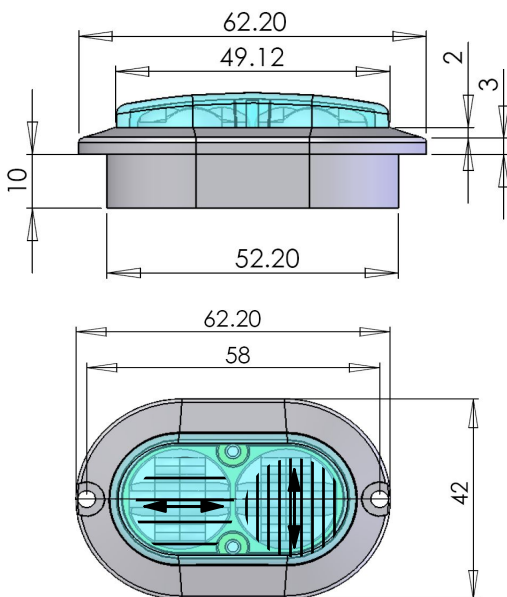

HORIZONTAL + VERTICAL OPTICS

Technical Data	
Voltage	12..30VDC
Amps	1.2A
Patterns	Quad-split-flash
Protection	IP-66
Temperature	-30..+70 degr.Celsius
Cable	UL certified
LED	4 + 4 (3-Watt, K-LED Philips Lumiled)
Optics	R65 Horizontal ot Vertical
Watt	16+16 Watt
Luminous Intensity	>240 CD effective @25m
Housing	Aluminium (EDP)
Lens	Clear, Polycarbonate
Heat Sink	Aluminium (EDP)
Synchronisation	up to units
Variances	blue+amber/+white/+red/+green/+magenta
	Scene light with Doctor Optics

Aluminium (EDP) = black sandblast Electro Deposit Coating

TECHNICAL DETAILS FOR INFORMATION ONLY. All rights reserved. Alle rechten voorbehouden.