


| Vertical | Horizontal |



Specifications

Powerconsumption: 12 Watts (per color)
 LEDs : 6 pcs (12pcs Dualcolor) 3-Watt LED onChip
 Voltage : 12/24VDC
 Temperature : -30...+65°C
 Patterns : 14x (SAE) 6x(ECE-R65) incl. Alternating : single, double, triple.
 Synchronisation : Interlink, up to 10 units
 Weight : 70 Grams
 IP-rating : IP67
 Homologation : ECE-R10, ECE-R65 Class-2 Blue & Amber (X type)
 Housing : Aluminium (EDP)
 Lens : Polycarbonate + U.V. Coating
 Size : 120x26x10mm
 Protection: : waterspray tested acc. IP-67

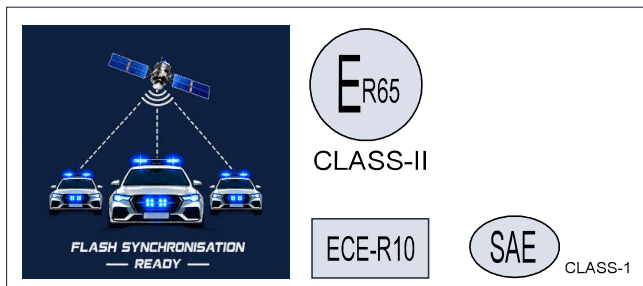

Ultra Thin Directional Warning Light

This is a flat and compact high-performance directional warning light with ECE- R65 type-approval or SAE compliance.

Fitted with the latest generation of 3-watt LED bulbs. The dual-color version is also available with vertical optics and is ideal for vertical grilles or where vertical mounting is required.

Thanks to its Class 2 certification, this lamp meets the highest requirements of the UN-ECE Commission in accordance with Regulation R65, featuring day and night modes. For the dual-color versions, the primary and secondary colors can be set separately for the flashing pattern.

The SAE version is available with a red or blue lens. Other variants or combinations are available on request. Complies with the international quality standards of car and motorbike manufacturers, including UV and stone-chip protection, hygroscopic operation with a membrane, and comprehensive EMC interference suppression.

Complies with automotive safety requirements regarding radius for vehicle bodywork components and the visual specifications for priority vehicles in accordance with Type X, Class 2 of UN-ECE Regulation 65.

Simple installation and programming without the need for special tools.

Lens color	Horizontal	Vertical	ECE-R65	SAE	Version
	•		CL2		Formula-AB
		•	CL2		Formula-AB-V
	•			CL1	Formula-BR
		•		CL1	Formula-BR-V
	•			CL1	Formula-R
	•		CL2		Formula-B
	•		CL2		Formula-A
	•			CL2	Formula-RR
	•			CL2	Formula-BB

Any Ohter version on request.



Distributor

W&G Kommunikationstechnik bv
 Zuidergracht 21 | 3763 LS | Soest
 The Netherlands
 info@wgcomtec.com | +31 (0)346 556 323